


**3i CCTV**  
iP, integration, intelligent



nHUB-12P2U (12port POE + 2port UTP)  
nHUB-12P2S (12port POE + 2port SFP)

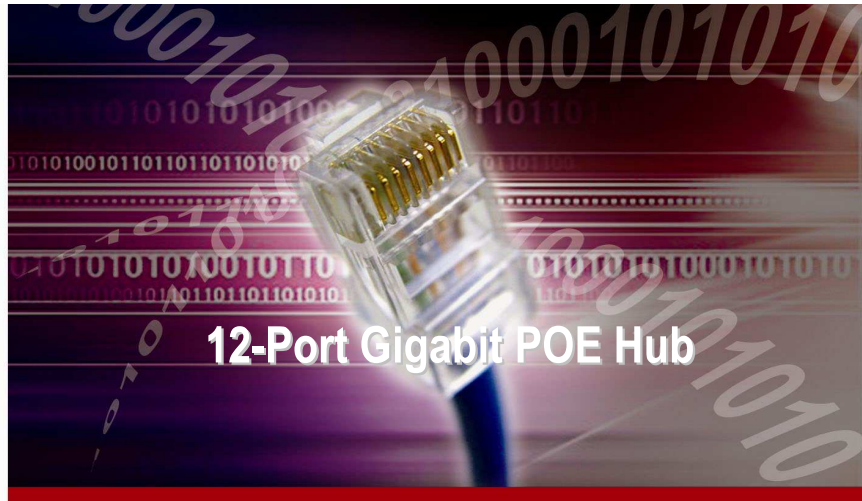


**12-Port Gigabit POE Hub**

<b>Model</b>	<b>nHUB-12P2U</b> (12port POE + 2port UTP) <b>nHUB-12P2S</b> (12port POE + 2port SFP)
<b>Standard</b>	IEEE802.3i 10Base-T, 10Mbit/s IEEE802.3u 100Base-T, 100Mbit/s IEEE802.3ab 1000Base-T, Gbit/s IEEE802.3af Power over Ethernet (PoE) IEEE802.3z 1*SFP, Gbit/s
<b>Interface</b>	Port No.: 10/100/1000Base-TX with POE injector x 12 10/100/1000Base-TX UTP port x 2 or SFP port x 2
<b>Port</b>	Port DC48V, 300mA (Maximal every port)
<b>Power</b>	Power Input 90 to 240 VAC, 50/60 Hz (socket) Power consumption 200W (Full load)
<b>Mechanical</b>	Enclosure Aluminum material Rackmount 19" 1U Standard Rackmount (optional) Volume 350 (L) x 195 (W) x 50 (H) mm Weight 220g
<b>Environment</b>	Operating Temperature 0 to 50 °C Operating Humidity 10% to 80% R.H. Storage temperature (-)10 to (+) 70 °C Storage Humidity 5% to 95%
<b>Certification</b>	CE,FCC,RoHS

**Recommended System Configuration**

**7-Layer Cascade Configuration**

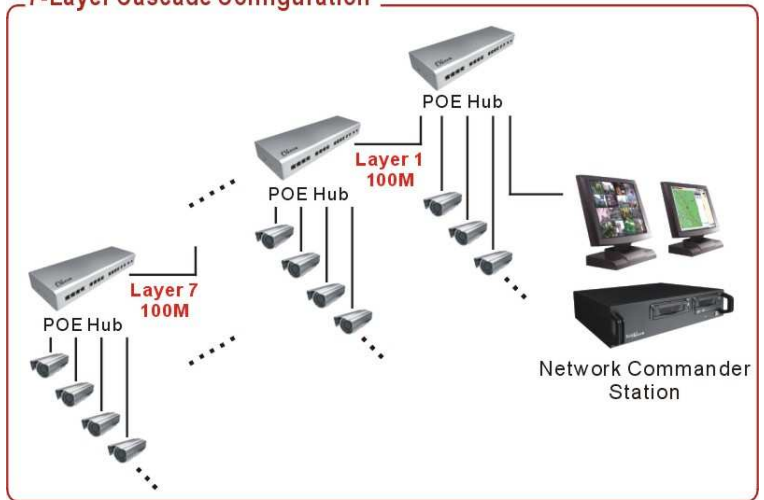

**Star Configuration**

