


3i CCTV
iP, integration, intelligent

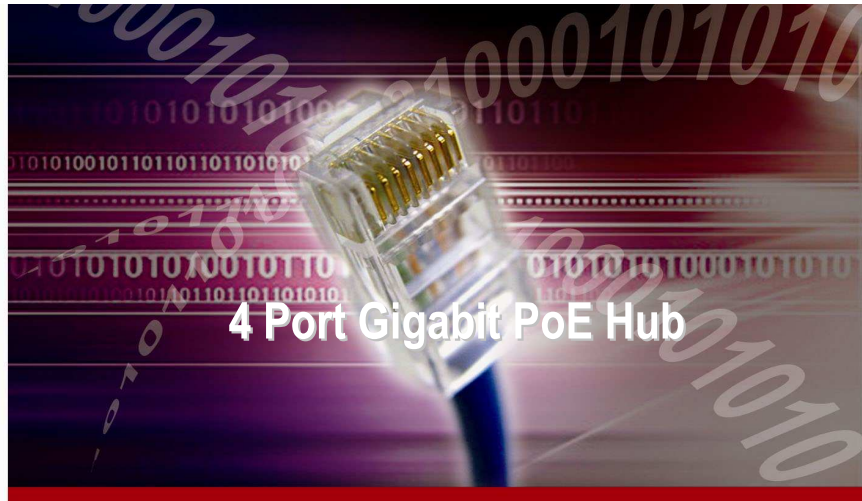


4 Port Gigabit PoE Hub

Model number	: nHub-4P
Standard:	
IEEE802.3i	:10Base-T, 10Mbit/s
IEEE802.3u	:100Base-T, 100Mbit/s
IEEE802.3ab	:1000Base-T, Gbit/s
IEEE802.3af	:Power over Ethernet (PoE)
Interface:	
Number of Ports	:10/100/1000Base-TX with PoE injector x 4 :10/100/1000Base-TX UTP port x 1
Connectors	:10/100/1000TX: RJ-45 x 5
Power Provision	: DC48V, 300mA per each port (max.)
Power Requirement:	
Power Input	: 90 to 240 Vac, 50/60 Hz (socket)
Power Consumption	: 55W (full loading)
Mechanical:	
Enclosure	: Aluminum material
Installation	: Wall mount or desktop
Dimension	: 188 (L) x 105 (W) x 44 (H) mm
Weight	: 580g
Environment:	
Operating	: 0 to 50°C, 10% to 80% R.H. (Non-condensing)
Storage	: (-)10 to (+) 70°C, 5% to 95% (non-condensing)
Approvals	: CE, LVD, FCC, RoHS

Recommended System Configuration

Cascade Configuration

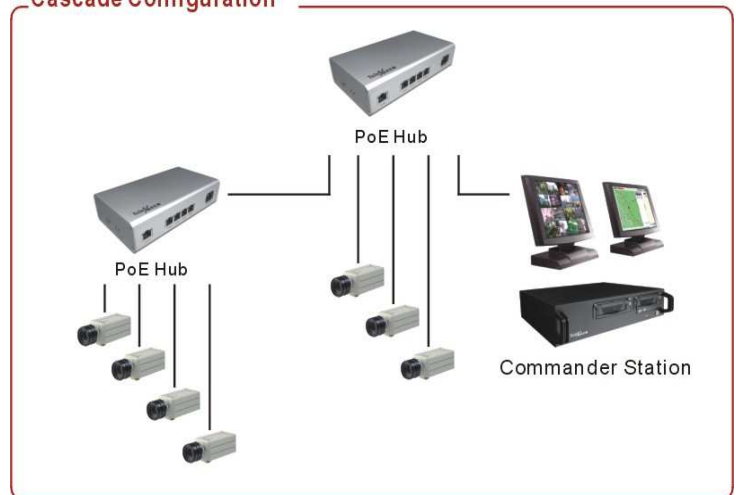

Star Configuration

